


# INTRINSICALLY SAFE INTELLIGENT PHOTOELECTRIC SMOKE SENSOR MODEL 2251EIS

## FEATURES:

- Compatible with existing System Sensor Protocol
- Low profile design
- Reliable analogue addressable communications
- Rotary decade address switches
- Tamper Resistant
- Twin LED indicators provide 360° visibility
- Built in test switch
- Must be used in conjunction with IST200 Translator Module and Y72221 Galvanic Isolator
- Compatible with the existing standard range of intelligent sensor, isolator and relay bases
- BASEEFA Approved to EEx ia IIC T5 for use in Zone 0 hazardous environments

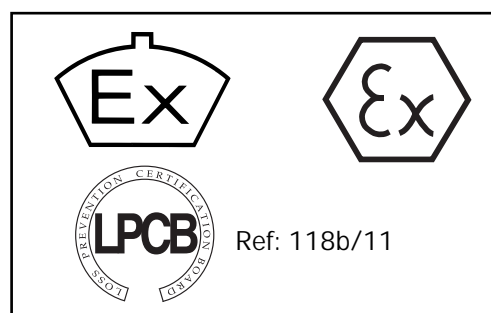

## DESCRIPTION:

The 2251EIS analogue addressable photoelectric sensor is a plug in intrinsically safe smoke sensor combining an optical sensing chamber with analogue addressable communications. As an intrinsically safe sensor, the 2251EIS has been designed specifically to provide fire protection for most hazardous environments, and has therefore been engineered so that it cannot become a source of ignition in areas where potentially explosive atmospheres are likely to arise.

The 2251EIS sensors are approved by the British Approvals Service for Electrical Equipment in Flammable Atmospheres (BASEEFA) to EEx ia IIC T5, for use in hazardous environments. The 2251EIS sensor is therefore suitable for use in Zone 0 areas and with most gases, including hydrogen and acetylene.

The 2251EIS has two integral LED's which provide local visual indication of the sensor status. These LED's provide a dual function. In the event of an alarm, they can be switched ON continuously, and can also be programmed to either blink when polled by the panel or remain off during normal conditions. In addition to it's integral LED's, the 2251EIS can be connected to a Remote LED indicator.

The individual loop address of each 2251EIS can be easily set and read, using the rotary decade address switches located on the rear of each sensor. The use of decimal address codes significantly reduces the potential for incorrect address selection.

Each sensor base includes a tamper resistant option which, when activated, prevents the removal of the sensor from it's base without the use of a tool. Full circuit functionality can be easily confirmed on site by use of the sensor test switch. Operation of this magnetic switch will generate an alarm response to the fire alarm control panel, making system testing both convenient and simple.

All System Sensor products are covered by our extended 3 year warranty.

**EUROPEAN HEADQUARTERS**  
**SYSTEM SENSOR EUROPE**  
**3 HORSHAM GATES**  
**HORSHAM**  
**WEST SUSSEX**  
**RH13 5PJ**  
**UNITED KINGDOM**  
**TEL: +44 (0)1403 276500**  
**FAX: +44 (0)1403 276501**  
**EMAIL: sales@sseuk.com**

**EUROPEAN MANUFACTURING CENTRE**  
**PITTMAY TECNOLOGICA SPA**  
**VIA CABOTO 19/3**  
**34147 TRIESTE**  
**ITALY**

**TEL: +39 040 9490111**  
**FAX: +39 040 382137**

[www.systemsensoreurope.com](http://www.systemsensoreurope.com)




# IST200 INTELLIGENT TRANSLATOR MODULE

## DESCRIPTION:

The IST200 translator module is intended for use with analogue addressable systems and in conjunction with 2251EIS intrinsically safe photoelectric smoke sensors. The IST200 translator module serves as an interface between the control panel and up to a maximum of 15 x 2251EIS smoke sensors. The IST200 must also be used in conjunction with a Y72221 galvanic isolator barrier (see below). To ensure correct operation, the IST200 must only be connected to a listed compatible Control Panel.

The IST200 translator module can be easily mounted within System Sensor's existing SMB500 surface mount box (see diagram). The IST200 must be located within a safe environment.

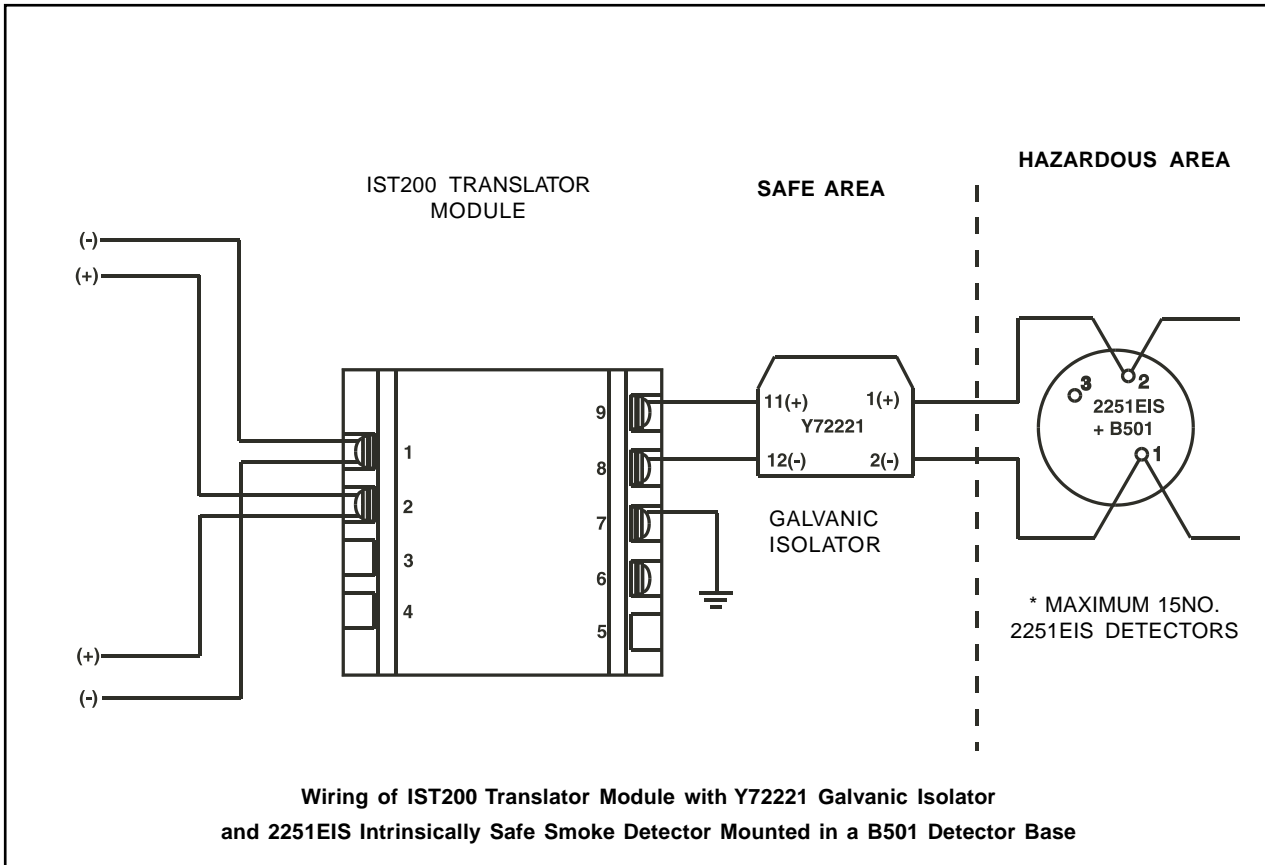


## Y72221 GALVANIC ISOLATOR

### DESCRIPTION:

The Y72221 Galvanic Isolator is a single channel isolated repeater. It is suitable for use as an intrinsically safe isolator between an IST200 translator module and up to a maximum of 15 x 2251EIS intrinsically safe photoelectric smoke sensors. The Y72221 is designed to transfer a DC current from a safe area to the hazardous area load, from a 24V DC nominal voltage. An AC signal ranging from 0.6 to 24V will then be transferred, allowing communication to the 2251EIS sensors in the hazardous area.

We would recommend the use of the Y72221 with all installations of 2251EIS sensors. We do not recommend the use of zener barriers, as they need to be tied to a high integrity earth, which can lead to earth fault indications on some Fire Control Panels. Please refer to the Fire Control Panel manufacturer for compatibility information. The Y72221 is certified intrinsically safe to EEx ia IIC.

The Y72221 is suitable for DIN rail mounting and can therefore be mounted within any electrical box with suitable DIN rail.

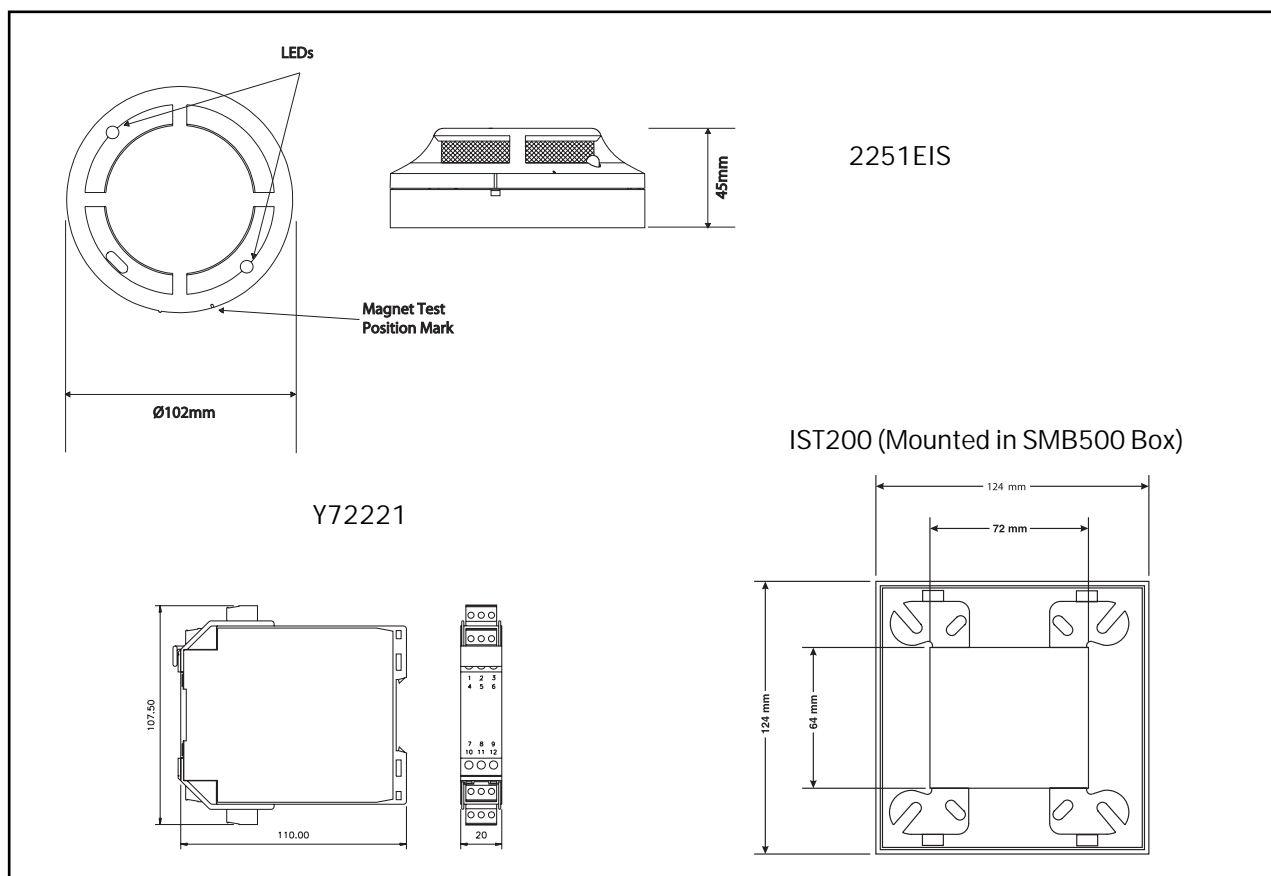

## SPECIFICATIONS:

### 2251EIS INTRINSICALLY SAFE INTELLIGENT SMOKE SENSOR

#### Electrical

Operating Voltage	17 to 24VDC
Maximum Average Standby Current	330 $\mu$ A (with LED blink enabled)
Maximum Alarm Current (LED on)	4.2mA at 24VDC

#### Environmental

Operating Temperature Range	-10°C to +60°C
Humidity	5% to 95% Relative Humidity (non-condensing)

#### Mechanical

Height	45mm installed in B501 base
Diameter	102mm installed in B501 base
Weight	115g
Max Wire Gauge for Terminals	2.5mm <sup>2</sup>
Colour	Pantone Warm Grey 1C
Material	Bayblend FR110

#### Wiring

The capacitance and inductance or inductance/resistance (L/R) ratio of the cable connected to the hazardous area between the 2251EIS base's (B501) power terminals (1 and 2) must not exceed the following values: -

Group	Capacitance ( $\mu$ F)	Inductance (mH)	L/R Ratio ( $\mu$ H/ $\Omega$ m)
IIC	0.083	4.2	55
IIB	0.65	12.6	165
IIA	2.15	33.6	440

## IST200 TRANSLATOR MODULE

### Electrical

Input Voltage Range	15 to 32VDC
Output Voltage	20 to 24VDC
Input Supply Current at 15V	21mA maximum*
Input Supply Current at 24V	14mA maximum*
Max Wire Gauge for Terminals	2.5mm <sup>2</sup>

\* with minimum barrier resistance, recommended quantity of 2251EIS detectors, and normal operating conditions

### Environmental

Operating Temperature Range	0°C to 60°C
Humidity	5% to 95% Relative Humidity (non-condensing)

### Mechanical

Height	70mm
Width	70mm
Depth	32mm
Weight	142g
Max Wire Gauge for Terminals	2.5mm <sup>2</sup>

## Y72221 GALVANIC ISOLATOR

### Electrical

Input Voltage Range	20 to 24VDC
Output Voltage	0.6 to 24VAC
Current Range	1 to 20mA
Short Circuit Current (Output)	65mA maximum

### Environmental

Operating Temperature Range	-20°C to +60°C
-----------------------------	----------------

### Mechanical

Height	107.5mm
Width	20mm
Depth	110mm
Weight	100g
Max Wire Gauge for Terminals	2.5mm <sup>2</sup>
Maximum 2251EIS Sensors	15*
Maximum IST200 between Isolators	2*

\* - refer to the control panel manufacturer for overall loop capacities