



ProxCard II HID-C1326KSF. Regular proximity card.

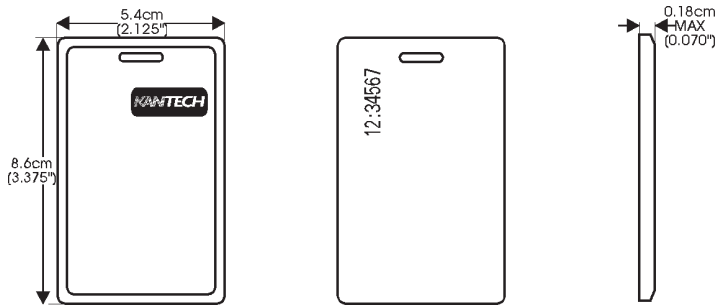


Part #	HID-C1326KSF
Typical read range	
MiniProx / ThinLine II.....	10 - 14 cm (4" - 5.5")
ProxPro.....	14 - 20 cm (5.5" - 8")
MaxiProx.....	40 - 60 cm (16" - 24")
Card dimensions	8.57 x 5.40 x 0.18 cm (3.375" x 2.125" x 0.070")
Card construction	ProxCard II proximity cards are slot punched, and are compatible with most adhesive photo pouches.
Operating temperature	-45 °C to 70 °C (-50 °F to 160 °F)
Humidity	5% to 95% non condensing
Weight	6.8 gr (0.24 oz)
Certification	UL, CE

ProxKey II HID-C1346KSF. Keytag format.

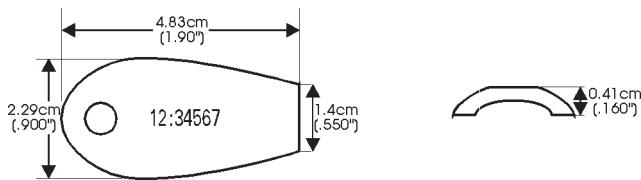


Part #	HID-C1346KSF
Typical read range	
MiniProx / ThinLine II.....	5 cm (2")
ProxPro.....	7.6 cm (3")
MaxiProx.....	30.4 cm (12")
Card dimensions	4.83 x 2.29 x 0.41 cm (1.9" x 0.9" x 0.160")
Card construction	The ProxKey II proximity cards are strong and resistant to cracking and breaking.
Operating temperature	-45 °C to 70 °C (-50 °F to 160 °F)
Humidity	5% to 95% non condensing
Weight	7.3 gr (0.26 oz)
Certification	UL, CE

ISOProx II HID-C1386KSF. Proximity Card, a photo can be printed directly on the card (imaging).

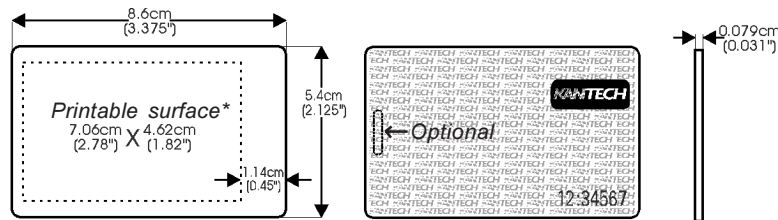


Part #	HID-C1386KSF, HID-C1386KSF/GG
Typical read range	
MiniProx / ThinLine II.....	10 cm (4")
ProxPro.....	15 cm (6")
MaxiProx.....	40.5 cm (16")
Card dimensions	5.40 x 8.57 x 0.079 cm (2.125" x 3.375" x 0.031")
Card construction	ISOProx cards are thin, flexible polyvinyl chloride laminate.
Operating temperature	-45 °C to 70 °C (-50 °F to 160 °F)
Humidity	5% to 95% non condensing
Color HID-C1386KSF	Front: glossy white. Back: white matte
Color HID-C1386KSF/GG	Glossy white on both side no logo
Weight	6.8 gr (0.24 oz)
Certification	UL, CE

DuoProx II HID-C1336KSF. Proximity/Magnetic Card, a photo can be printed directly on the card (imaging)

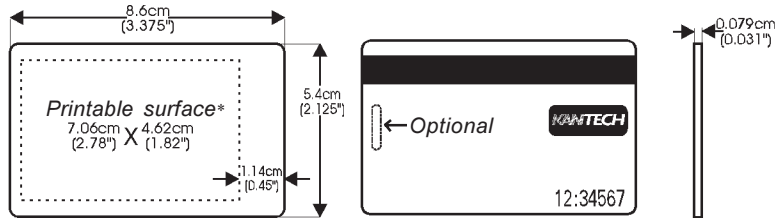

Part #	HID-C1336KSF, HID-C1336KSF/GG
Typical read range	
MiniProx / ThinLine II.....	10 cm (4")
ProxPro.....	15 cm (6")
MaxiProx.....	40.5 cm (16")
Card dimensions	8.57 x 5.40 x 0.079cm (3.375" x 2.125" x 0.031")
Card construction	DuoProx multiple technology cards are a thin, flexible laminate with ABA standard three-track magnetic stripe not encoded.
Operating temperature	-45 °C to 70 °C (-50 °F to 160 °F)
Humidity	5% to 95% non condensing
Color HID-C1386KSF	Front: glossy white. Back: white matte
Color HID-C1386KSF/GG	Glossy white on both side sans logo
Weight	6.8 gr (0.24 oz)
Certification	UL, CE

PhotoProx HID-C1366KSF. Proximity Card, a photo can be laminated with a standard photo laminator.

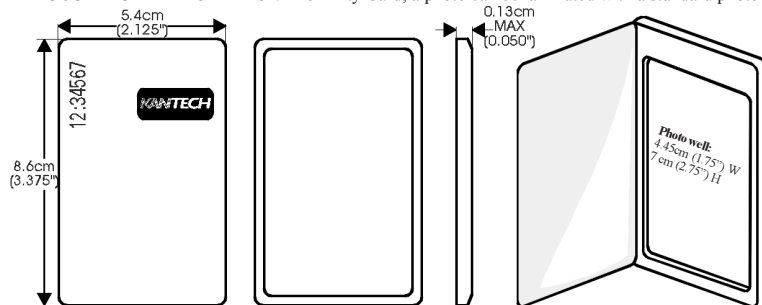

Part #	HID-C1366KSF
Typical read range	
MiniProx / ThinLine II.....	8 - 12 cm (3" - 5")
ProxPro.....	14 - 18 cm (5.5" - 7")
MaxiProx.....	46 - 61 cm (18" - 24")
Card dimensions	8.57 x 5.40 x 0.13 cm (3.375" x 2.125" x 0.050")
Card construction	PhotoProx ID cards are thin and flexible with an integral photo flap bonded on edge of the card.
Operating temperature	-45 °C to 70 °C (-50 °F to 160 °F)
Humidity	5% to 95% non condensing
Weight	6.8 gr (0.24 oz)
Certification	UL, CE

Security: The readers recognize over 16.7 million unique codes. Using Kantech's KSF cards (Kantech Secure Format) provides increased security and an absolute guarantee of no duplication of cards.

* Print quality may be affected by the printer or environment cleanliness. Kantech is not responsible for image quality variation.