

M500KACW ADDRESSABLE WATERPROOF CALLPOINT

FEATURES:

- *Two wire connection for easy installation*
- *Suitable for flush mounting or surface mounting*
- *Simple decimal address setting*
- *Integral LED controlled from panel*
- *Conforms to BS5839 part 2*
- *Ingress protection level to IP67*

DESCRIPTION:

The M500KACW is designed to be used as a component of a compatible fire control system using System Sensor analogue addressable devices. It is a dedicated addressable callpoint for installation on the two wire communication circuit providing both signalling of alarm to the monitoring control panel and local LED indication of activation.

The M500KACW is manufactured in a specially designed call point housing which can be installed in any environment where an Ingress Protection rating IP67 is suitable. In practice, this means that the M500KACW can be installed externally or internally as the callpoint is truly weatherproof.

The M500KACW comes complete as an installation unit with a specially designed front cover and rear mounting base. No holes should be drilled in the call point housing as this will affect its IP rating and all cable terminations will be made through the two holes provided in the top and bottom of the rear mounting base.

SPECIFICATIONS:

Operating temperature range:	-10°C - 60°C
Minimum Operating Voltage:	15V
Maximum Operating Voltage:	30V
Standby Current:	200µA
Alarm Current:	5mA
IP rating:	IP67



FIGURE 1. M500KACW ADDRESSABLE CALLPOINT

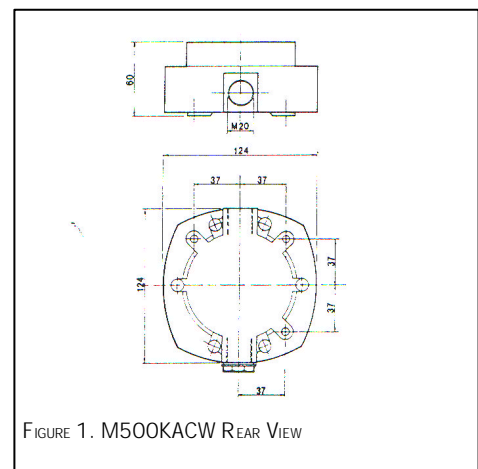


FIGURE 1. M500KACW REAR VIEW

EUROPEAN HEADQUARTERS
SYSTEM SENSOR EUROPE
3 HORSHAM GATES
HORSHAM
WEST SUSSEX
RH13 8PH
UNITED KINGDOM
TEL: +44 1403 276600
FAX: +44 1403 276601
e-mail: Sales@systemsensor.co.uk

EUROPEAN MANUFACTURING CENTRE
PITTIWAY TECHNOLOGICAL SPA
VIA CARONTO 19
340147 TREVISO
ITALY

TEL: +39 0422 997111
FAX: +39 0422 21197

